

Series

Piva ALG/Piva ALG Roller

Minimal and versatile profiles

Featuring minimal profiles, this series is ideal for use on walls of limited thicknesses. Tilt&turn opening mechanism with the option of opening outwards, with or without roller shutter. External or internal fitting frame to meet any type of on-site building requirements.

Tilt&Turn Windows external fitting

The PIVA ALG tilt&turn window was designed for applications on outside and inside walls (mainly thin ones) of new, old, provisional or temporary structures. This type of window is strong and practical, and the particular way it opens makes it suitable for every field of application. The profiles are designed especially for systems with roller shutter or hinged PVC shutters.





Tilt&turn windows with roller shutter external fitting

The profiles are designed especially for systems with roller shutter or hinged PVC shutters.



Air permeability
according EN 12207

Class 3

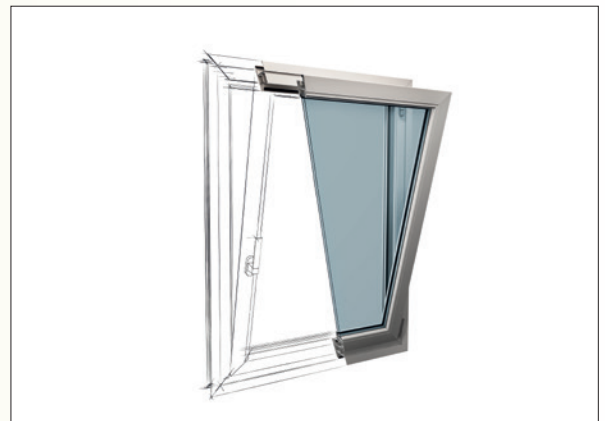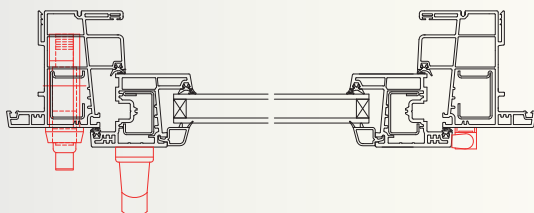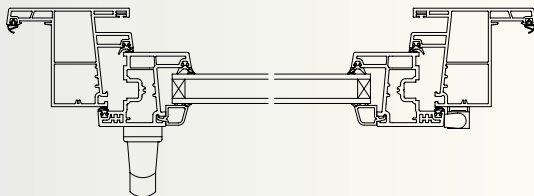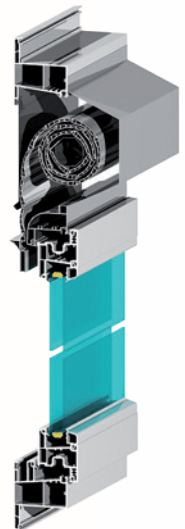

Water Tightness
according to EN 12208

Class 8A

Wind Resistance

Class C4

Fire reaction
according to DIN 4102

Class B1

Air permeability
according EN 12207

Class 4

Water Tightness
according to EN 12208

Class 8A

Wind Resistance

Class C4

Fire reaction
according to DIN 4102

Class B1



DATASHEET

Extruded profiles in rigid white PVC.

Sealing system with co-extruded EPDM gaskets on sash and frame.

Depth of frame system: 77 mm.

Depth of sash: 58 mm.

Optional insertion of glass panels of a thickness ranging between 23 and 30 mm (insulating glazing, single or stratified pane).

Optional application of slat-holder frame.

Closure system with white nylon handle.

Optional surface coating applied by leading certified specialised companies.

Optional application of aluminium anti-intrusion bars.

TOptional application of external (fixed or hinged) screens.

Opening system with modular fittings made of galvanised steel with pressure die-cast aluminium components.